


Sample Design

- Provide 3000-gallon frost free underground water tank with 1" water inlet supply on a flat valve to maintain the tank full.
- Provide a 3" PVC, schedule 40 or heavier, draft pipe capped on its end with suction holes ¼" diameter drilled the bottom 6" of the sides
- Tank location and piping to be inspected and approved prior to building.

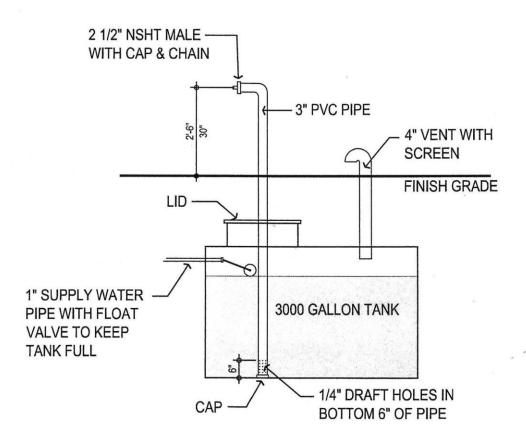

Phone: (208) 686-1718 Fax: (208) 686-1191 email: admin@worleyfire.com